



# Lemvig Maskin- & Køleteknik ApS


Havnen 12A · DK-7620 Lemvig · Danmark · [www.lemvigmk.dk](http://www.lemvigmk.dk) · E-mail: [lmk@lemvigmk.dk](mailto:lmk@lemvigmk.dk)  
Tel. +45 97 82 32 33 · Mobil +45 21 20 80 33 · CVR DK27088805



## LMK

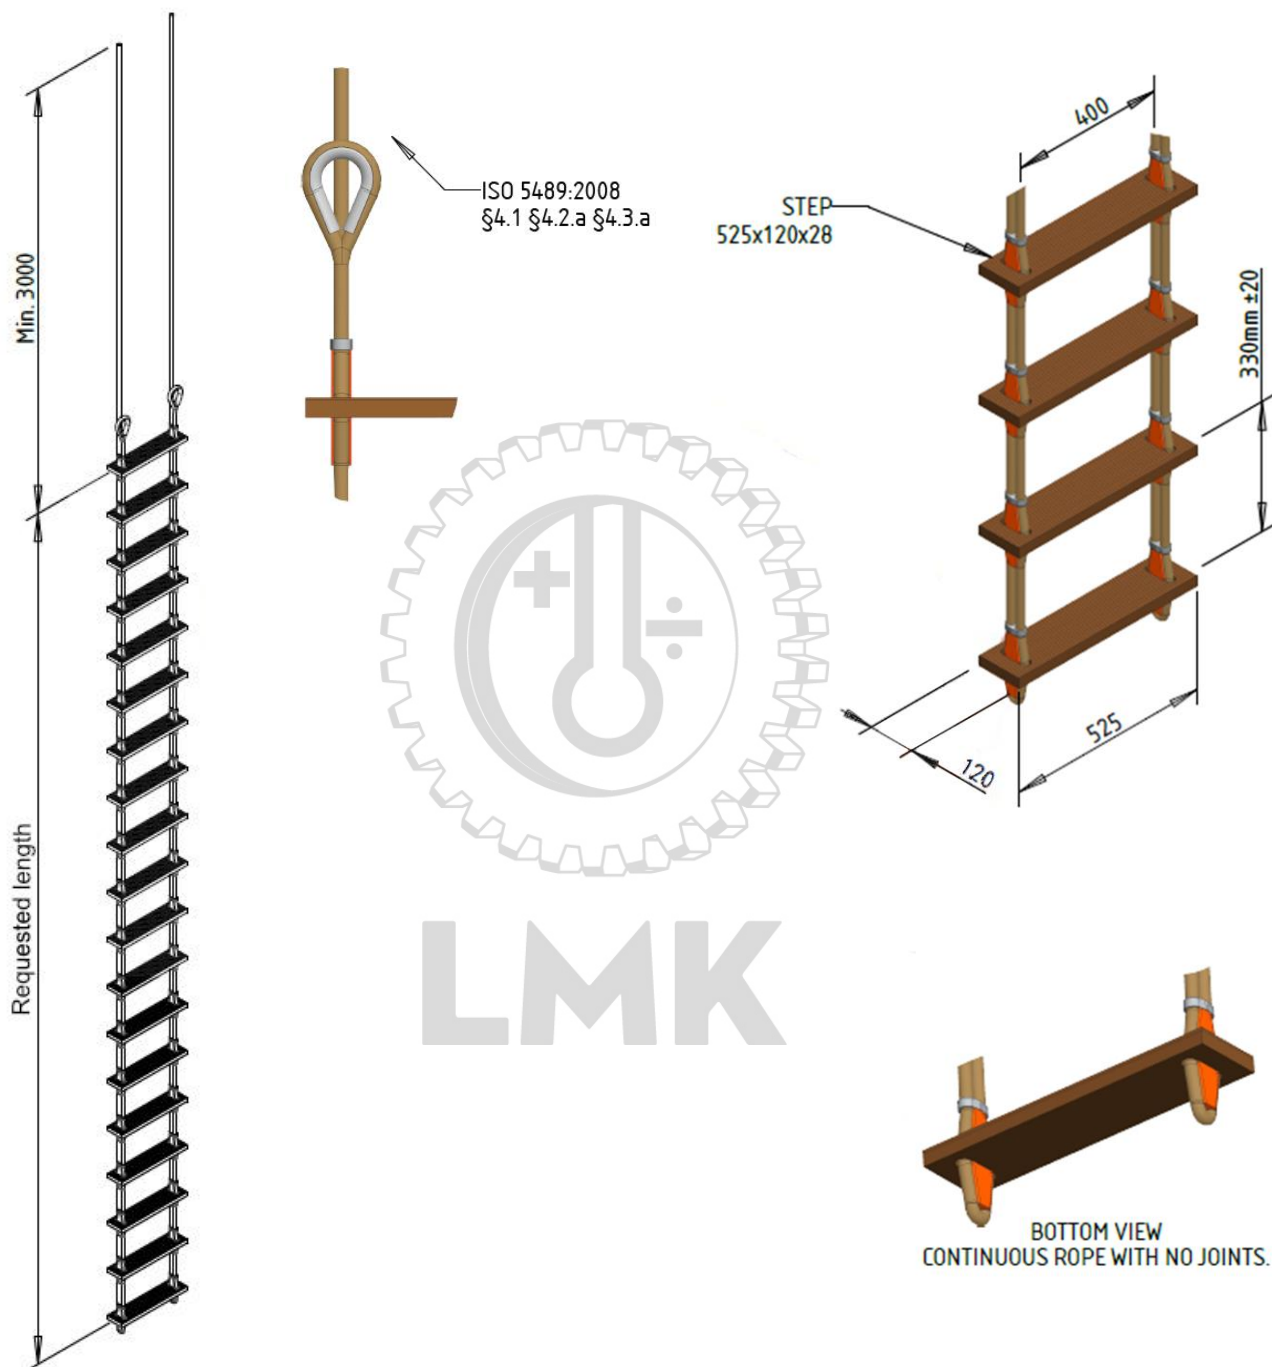

- Steps have non-skid / anti-slip surface.
- The side ropes of the embarkation ladder consist of two uncovered ropes not less than 18 mm in diameter on each side and should be continuous at the bottom, with no joints and have a breaking strength of at least 24kN per side rope.
- The midpoint half-length being located on a thimble large enough to accommodate at least two passes of each side rope.
- Steps are secured with PTR's patented sea water resistant aluminium clamping system.

Type:	<i>Thetis Embarkation Ladder</i>	Material:	<i>Hardwood</i>
Class:		Approval:	<i>M.E.D according to DIN/ISO 5489:2008 / SOLAS 74</i>

NOTE: THIS INFO SHEET IS FOR INFORMATION ONLY AND WILL MIGHT DEVIATE FROM THE DELIVERED EQUIPMENT.