



Lemvig Maskin- & Køleteknik ApS


Havnen 12A · DK-7620 Lemvig · Danmark · www.lemvigmk.dk · E-mail: lmk@lemvigmk.dk
Tel. +45 97 82 32 33 · Mobil +45 21 20 80 33 · CVR DK27088805



LMK

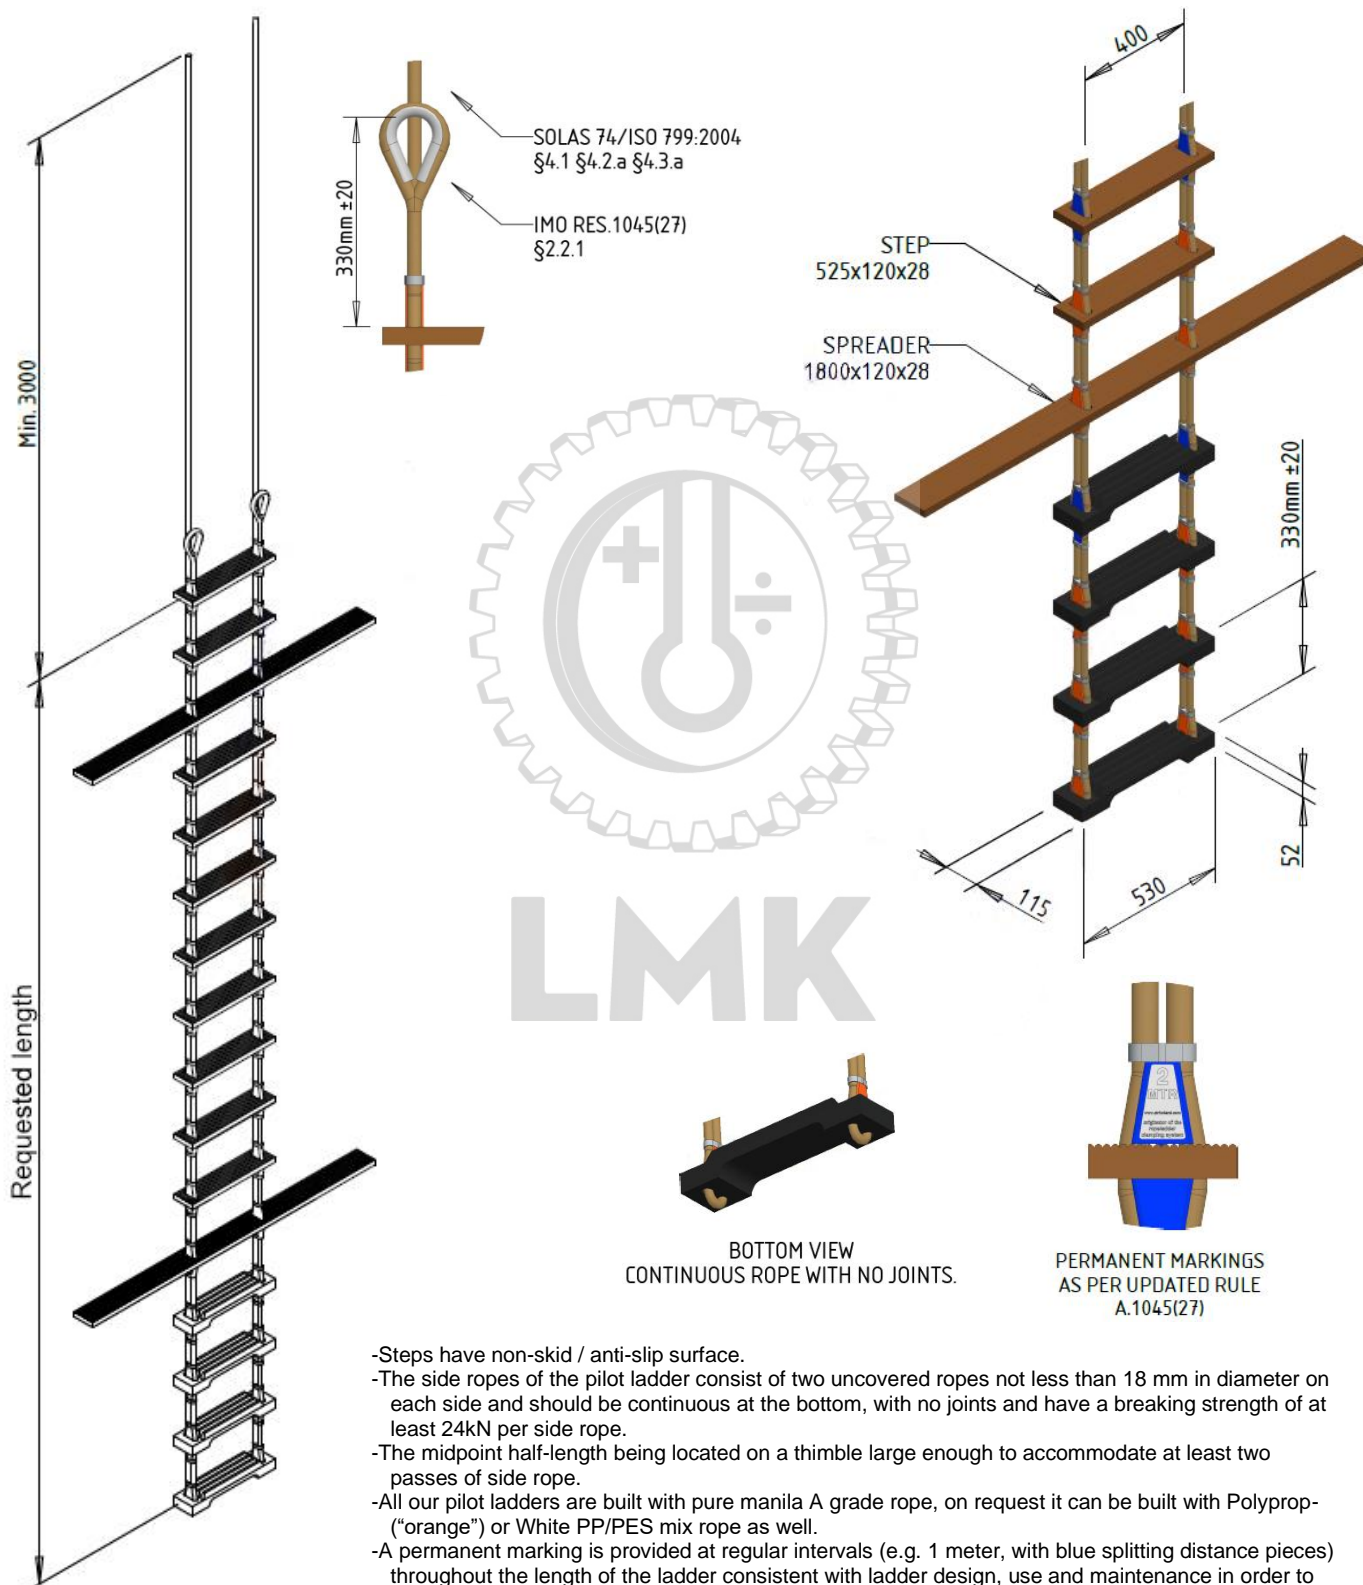

- Steps have non-skid / anti-slip surface.
- The side ropes of the pilot ladder consist of two uncovered ropes not less than 18 mm in diameter on each side and should be continuous at the bottom, with no joints and have a breaking strength of at least 24kN per side rope.
- The midpoint half-length being located on a thimble large enough to accommodate at least two passes of side rope.
- All our pilot ladders are built with pure manila A grade rope, on request it can be built with Polyprop ("orange") or White PP/PES mix rope as well.
- A permanent marking is provided at regular intervals (e.g. 1 meter, with blue splitting distance pieces) throughout the length of the ladder consistent with ladder design, use and maintenance in order to facilitate the rigging of the ladder to the required height.
- Steps are secured with PTR's patented sea water resistant aluminium clamping system.

Type:	<i>Thetis Pilot Ladder O.S.</i>	Material:	<i>Hardwood</i>
Class:		Approval:	<i>M.E.D according to DIN/ISO 799:2004 A.1045 (27) SOLAS 74</i>

NOTE: THIS INFO SHEET IS FOR INFORMATION ONLY AND WILL MIGHT DEVIATE FROM THE DELIVERED EQUIPMENT.